



AGRICULTURE

SOIL WORKING EQUIPMENTS

-  ANKARA / TURKIYE
-  +90 5530021952
-  agro@gkd.com.tr
-  www.gkdgroup.com.tr



TRAILED HEAVY TYPE DISC HARROW WITH HYDRAULIC LIFT



SPECIFICATIONS	UNIT	AGD18	AGD20	AGD22	AGD24	AGD26	AGD28	AGD30	AGD32
Disc Quantity	Pcs	18	20	22	24	26	28	30	32
Disc Diameter	mm	610x5	610x5	610x5	610x5	610x5	610x5	610x5	610x5
Disc Space	mm	225	225	225	225	225	225	225	225
Working Width	mm	2070	2300	2530	2760	2990	3220	3450	3680
Bearing No	Pcs	4	6	6	8	8	8	8	8
Frame	mm	100x200x6	100x200x6	100x200x6	100x200x6	100x200x6	100x200x6	100x200x6	100x200x6
Width	Cm	225	250	275	300	325	350	375	400
Length	Cm	550	550	550	550	550	550	550	550
Height	Cm	135	135	135	135	135	135	135	135
Necessary Power	Hp	70-75	75-80	80-90	90-120	120-140	150-160	160-170	180-200
Weight	Kgs	1480	1590	1655	1760	1795	1860	1935	2000

LIGHT TYPE TRAILED GOBLE DISC HARROW WITH HYDRAULIC LIFT




SPECIFICATIONS	UNIT	HGD 28	HGD 32	HGD 36	HGD 40
Disc Quantity	Pcs	28	32	36	40
Disc Diameter	mm	510x4	510x4	510x4	510x4
Disc Space	mm	175	175	175	175
Working Width	mm	2550	2900	3240	3600
Bearing No	Pcs	8	12	12	12
Frame	mm	100x150x5	100x150x5	100x150x5	100x150x5
Width	Cm	280	315	350	385
Length	Cm	550	550	550	550
Height	Cm	125	125	125	125
Necessary Power	Hp	60-75	70-80	80-90	90-100
Weight	Kgs	1250	1370	1490	1600

PRO-TILLER/DISC HARROW SPRING TYPE WITH ROLLER



SPECIFICATIONS	UNIT	BGD16	BGD18	BGD20	BGD22	BGD24	BGD26	BGD28	BGD30	BGD32
Disc Quantity	Pcs	16	18	20	22	24	26	28	30	32
Disc Diameter	mm	620	620	620	620	620	620	620	620	620
Disc Space	mm	250	250	250	250	250	250	250	250	250
Working Width	mm	2000	2250	2500	2750	3000	3250	3500	3750	4000
Width	Cm	265	265	265	265	265	265	265	265	265
Length	Cm	215	240	265	290	315	340	365	390	415
Height	Cm	146	146	146	146	146	146	146	146	146
Necessary Power	Hp	65-75	75-85	85-95	95-105	105-120	120-140	130-140	140-150	155-180
Weight	Kgs	1230	1350	1490	1600	1710	1835	1925	2100	2270

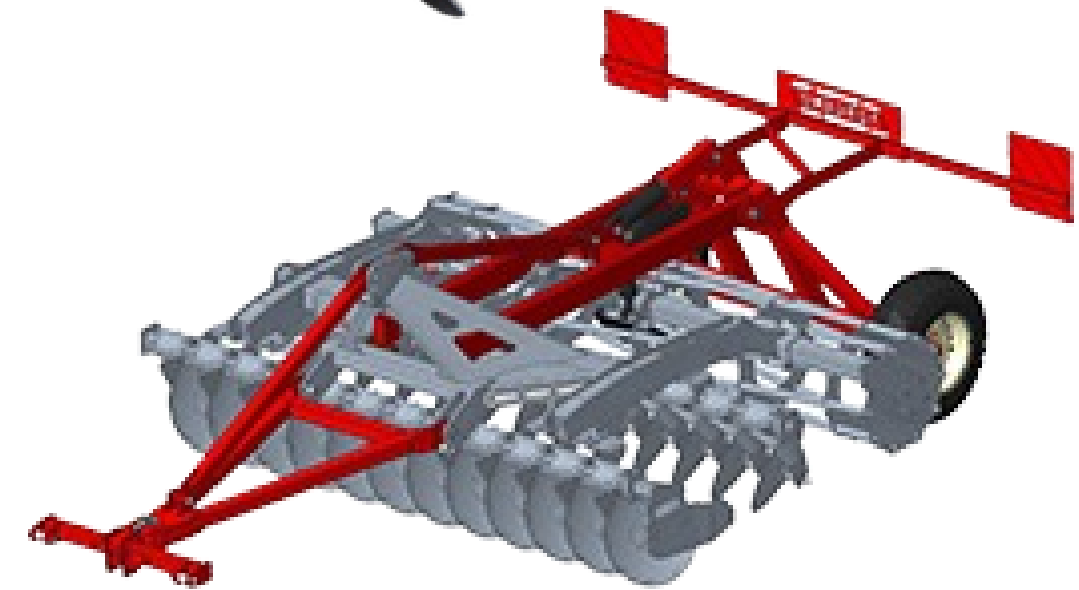

OPTINAL : TRAILING KIT

COMBI CULTIVATOR (WITH TRAILING KIT)



- STRONG FRAME
- SUPPORT WHEEL
- ROLLER
- LEVELING DISC

MODEL	N 300	N 350	N 400	K 400	K 450	CK 500	CK 600
Number of tines	10	12	13	13	15	17	19
Number of levelling disc	8	8	10	10	10	12	14
Under beam clearance (cm)	78	78	78	78	78	78	78
Working width (m)	3	3.5	4	4	4.5	5	6
Transport width (m)	3	3.5	4	2.7	2.7	2.7	2.7
Working depth (cm)	8-25	8-25	8-25	8-25	8-25	8-25	8-25
Power requirement (HP)	100-160	120-190	130-210	160-210	180-240	200-300	240-360
Weight with Ø 500 Tube Roller	1650	1920	2210	2840			
Weight with Ø 500 double Roller					3100	5400	5800
Linkage	Standard Cat3/Cat3N	Standard Cat3/Cat3N	Standard Cat3/Cat3N	Cat3/Cat4N	Cat3/Cat4N	Cat3/Cat4	Cat3/Cat4
Transport wheels					400/60-15.5	400/60-15.5	400/60-15.5

MODEL	WEIGHT (kg)	WORKING WIDTH (mm)	HEIGHT (mm)	REQUIRED POWER (HP)	WORKING DEPTH (mm)
VERONA-PM-2-9	700	2350	650	75-85	200-250
VERONA-PM-2-11	850	2850	650	85-95	200-250
VERONA-PM-2-13	1020	3400	650	95-105	200-250
VERONA-PM-2-15	1150	3900	650	105-120	200-250
VERONA-PM-2-17	1250	4500	650	120-140	200-250
VERONA-PM-2-19	1450	4800	650	140-160	200-250



**HEAVY – SPRING
CULTIVATOR
WITH ROLLER**



DISC PLOUGH

PRODUCT FEATURES

- 660 MM, 710 MM DIAMETER DISC OPTIONS.
- THE PERFECT SOLUTION FOR HIGH ABRASIVE, ROOTED OR STICKY SOIL CONDITIONS.
- DISC PLOWS ARE PRODUCED IN 2-3-4-5 ROWS AND ADAPT TO VARIOUS FIELD CONDITIONS.
- IT IS AN ECONOMICAL PLOW WHICH IS PREFERRED IN THE FIELDS COVERED WITH STONE AND VEGETAL ROOT.
- DISC PLOWS ARE LESS LIKELY TO CLOG WITH WEEDS, STUBBLE AND FARM MANURE.

TYPE (Inch)	DISC DIAMETER (cm)	DISTANCE BETWEEN DISCS (cm)	WORKING WIDTH (cm)	WORKING DEPTH (cm)	WEIGHT (kg)	POWER REQUIREMENT (HP)
ADIP 266	66	53	66	25	310	45-55
ADIP 366	66	53	99	25	400	60-70
ADIP 466	66	53	132	25	470	70-80
ADIP 566	66	53	165	25	540	90-110

LAND ROLLERS - FOLDABLE ROLLER



SPECIFICATIONS	UNIT	KM-4.5	KM-5	KM-5.5	KM-6
Roller Diameter	Cm	400	400	400	400
Working Width	mm	4500	5000	5500	6000
Width	Cm	203	213	223	233
Length	Cm	375	400	425	445
Height	Cm	125	125	125	125
Weight	Kgs	1700	1750	1805	1950



LAND ROLLERS

SPECIFICATIONS	UNIT	SM-22	SM-24	SM-26	SM-28	SM-30	SM-32	SM-34
Roller Diameter	Cm	34	34	34	34	34	34	34
Working Width	Cm	220	245	265	285	305	325	345
Width	Cm	80	80	80	80	80	80	80
Length	Cm	242	267	287	307	327	347	367
Height	Cm	175	175	175	175	175	175	175
Necessary Power	Hp	40-70	40-70	40-70	40-70	40-70	40-70	40-70
Weight	Kgs	495	560	590	625	670	705	740



OPTIONAL BIG MODELS

WORKING WIDTH (cm)	DISC DIA (mm)	WHEEL QTY (pcs)	WEIGHT (kg)
600	50	2	2400
650	50	2	2650
700	50	2	2900
750	50	4	3150
800	50	4	3400

LAND ROLLERS - WITH WHEEL

SPECIFICATIONS	UNIT	TM-30	TM-32
Roller Diameter	Cm	400	400
Working Width	Cm	305	325
Width	Cm	180	180
Length	Cm	327	347
Height	Cm	185	185
Necessary Power	Hp	50-80	50-80
Weight	Kgs	1075	1150

LASER LEVELER



Laser System

The machine is delivered with a standard TOPCON brand laser transmitter in a carrying case, along with a 360-degree laser receiver, control box, joystick control, solenoid valve cable connections, and a carrying bag. The products are under the distributor's warranty. Options include no slope, single slope, or double slope. Optional systems from other brands are available.

Remote Control – 1200 m operating range – Rugged, waterproof, and dustproof design. Long battery life – Single or dual slope input – High rotation speeds – Wind mode.

Laser Receiver and Controllers

Remote Control – 1200 m operating range – Rugged, waterproof, and dustproof design. Long battery life – Single or dual slope input – High rotation speeds – Wind mode.

Visual display indicators for manual control or automatic mode for hydraulic control.

Simple, secure, and includes a mechanical mounting bracket – 360-degree operation.

Bright, colorful indicators – Alkaline or rechargeable battery.

Adjustable sensitivity – Water and dustproof – Plumb indicator.

WIDTH OF WORK (cm)	WEIGHT (kg)	TOTAL LENGTH (cm)	POWER (HP)	POWER (kW)
300	2350	500	90-110	66-81
400	2450	500	110-120	81-88
500	2550	500	135-160	99-118
600	3500	550	180-200	132-147




Oar Features: Center and wing oars fold hydraulically for work and road conditions. Designed for the toughest conditions with its strong and sturdy hinge structure. Oar heights: 80 cm, 90 cm and 110 cm.

Blade Angle Adjustment: Blade angle (A) – Max: 55 degrees, Min: 35 degrees. Blade angle (A) can be adjusted by moving the adjustment piston. The operator can view the specified angle on the scale. The optimal angle can be adjusted based on the soil conditions of the leveled land and the tractor's characteristics, and this can even be done during operation. Angle adjustment is an important feature for optimally utilizing tractor traction power and minimizing fuel consumption.

Blade: As standard, we use 15 mm thick, double-sided Hardox 500 blades, manufactured in-house. Double-sided blades offer a significant advantage in terms of blade life. Optionally, we can also install single-sided grader blades upon customer request.

HYDRAULIC LEVELER

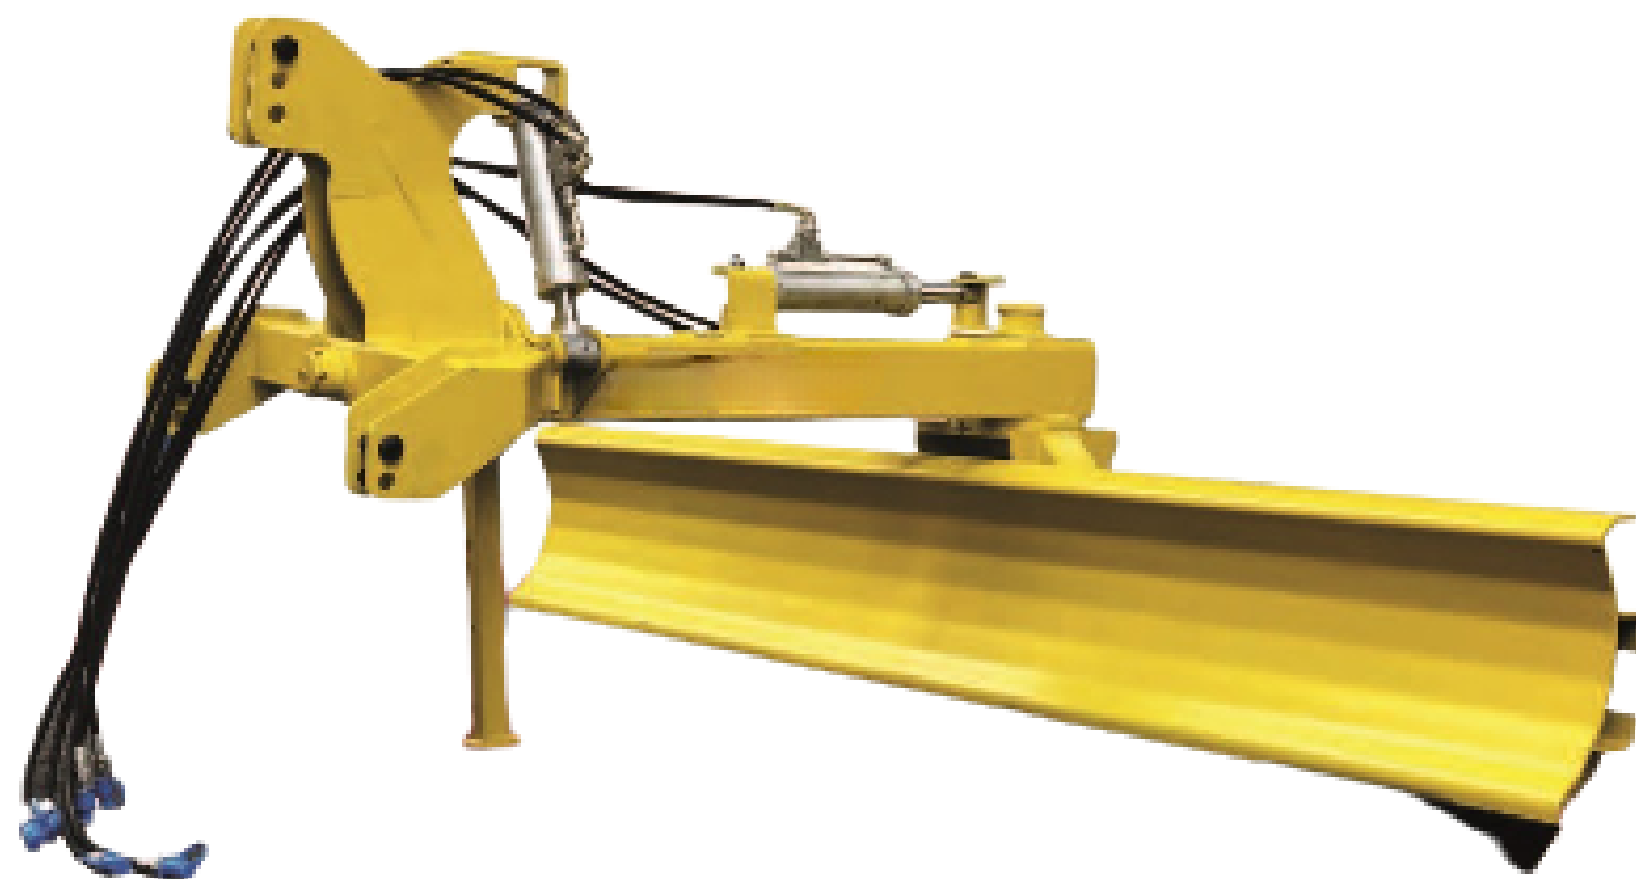

SPECIFICATIONS	UNIT	OKRK-200	OKRK-220	OKRK-240	OKRK-250	OKRK-300
Working Width	cm	200	220	240	250	300
Thickness	cm	6	6	8	10	10
Rowing Height	cm	55	55	55	70	70
Weight	kg	205	215	265	375	430
Power	HP	35-50	35-50	35-50	55-65	70-30